


Di2000T & Di2000R Driveway Informer™ Instructions

Driveway Informer is the trademark of Lord Henry Enterprises, Inc.

1-800-366-7235

Di2000T

The Di2000T is an outdoor **weatherproof** motion detector and transmitter that can be side or overhead mounted. See mounting and detection diagram below. The **Di2000T is supplied with a 9 volt alkaline battery** which must be connected prior to use. To access the battery, remove the two screws located on the back of the unit. In addition, the system can be set for a unique code to prevent interference from other units that may be in close proximity. Dip switches 1-4 are used to set the code and must match the settings on the Di2000R receiver. The Di2000T is shipped with the a pre-set “ding-dong” tone. Dip switch positions 5 & 6 allow selection of alternate tones. After accessing the battery or dip switches, replace cover and two screws.

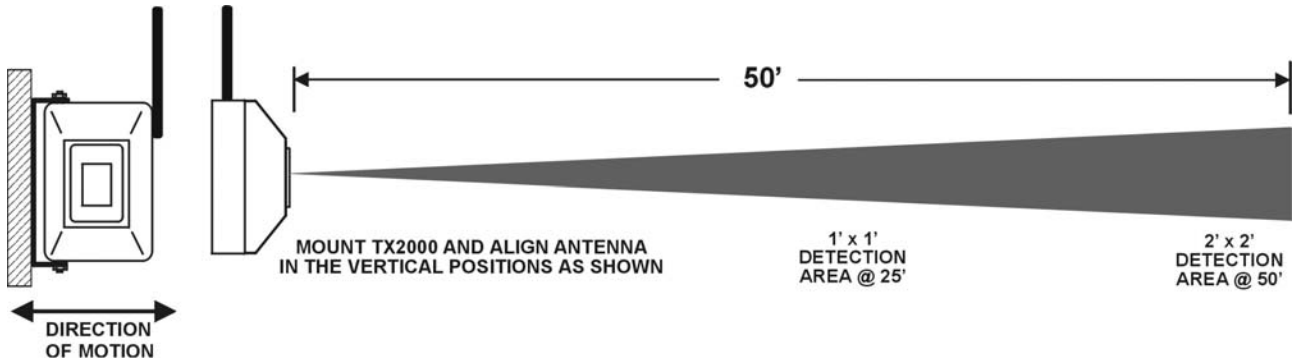

Di2000R

The Di2000R is a matching **Receiver/Chime unit for use in indoor locations only**. The Di2000R may be tabletop or wall mounted. Use the mounting template below for wall mount applications. A six position dip switch is located on the backside of the unit. Dip switch positions 1-4 must match the settings of the Di2000T above.

The Di2000R is provided with an internal speaker and auxiliary speaker output terminals marked **SPKR**. The volume knob controls both the internal and auxiliary speakers.

A set of additional 12VDC output terminals are provided for additional buzzers, strobe lights, sirens, or other 12VDC devices. Please observe marked (+/-) polarity when attaching additional devices. The output time may be set for 1 or 5 seconds by dip switch position 5. The OFF (down) position is 1 seconds and ON (up) position is 5 seconds. Note: position 6 is not used at this time. It is recommended that the 5 second setting be used in heavy traffic areas to reduce multiple rings.

The Di2000R is supplied with a built-in five digit LCD counter that will advance on each ring. The counter may be zeroed by pressing the small reset button located to the left of the counter.

GENERAL INSTALLATION GUIDELINES

The Di2000T and Di2000R are equipped with 360° rotational antennas. For best performance, it is strongly recommended that both antennas be positioned in the vertical plane. Di2000T and Di2000R system is designed for a range from 1500' to 3000'. **Conditions such as line of sight, automobiles, trees, fences, metal objects, and building construction, must be considered during installation, actual distances may vary.** Additional transmitters and receiver may be used in the same installation.

Di2000 MOUNTING TEMPLATE

X
SCREW HOLE

X
SCREW HOLE
